



Professional Hearing Solutions

Latest Hearing Aids



DATA SHEET

www.professionalhearingsolution.com

0332-5014111

Prompt S / P / SP

Technical Data



Prompt S

Earhook damped

- 62 dB / 132 dB SPL (ear simulator)
- 55 dB / 124 dB SPL (2 ccm coupler)

Prompt P

Earhook undamped

- 75 dB / 138 dB SPL (ear simulator)
- 70 dB / 134 dB SPL (2 ccm coupler)

Prompt SP



Earhook undamped

- 84 dB / 144 dB SPL (ear simulator)
- 80 dB / 140 dB SPL (2 ccm coupler)

ThinTube

- 53 dB / 125 dB SPL (ear simulator)
- 45 dB / 124 dB SPL (2 ccm coupler)

Prompt S | Technical Data

Type	Earhook damped		ThinTube	
				
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
at 1.6 kHz	–	129 dB SPL	–	116 dB SPL
Peak	124 dB SPL	132 dB SPL	124 dB SPL	125 dB SPL
HFA-OSPL 90	121 dB SPL	–	113 dB SPL	–
Gain				
Full on gain (FOG) at 1.6 kHz	–	49 dB	–	48 dB
Full on gain (Peak)	55 dB	62 dB	45 dB	53 dB
HFA-FOG	42 dB	–	41 dB	–
Reference test gain	42 dB	42 dB	36 dB	41 dB
Frequency, noise and directivity				
Frequency range	100-7100 Hz	1000-7100 Hz	100-7100 Hz	280-7100 Hz
Equivalent input noise	20 dB SPL	23 dB SPL	15 dB SPL	15 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	2 / 1 / 1 %	2 / 1 / 1 %	1 / 1 / 2 %	1 / 1 / 2 %
Tinnitus noiser broadband	–	–	–	–
AI-DI	3.5 dB		3.5 dB	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	–	–	–	–
HFA MASL (1 mA/m)	–	–	–	–
HFA SPLITS (left/right)	–	–	–	–
RSETS (left/right)	–	–	–	–
Battery				
Battery voltage	1.3 V		1.3 V	
Battery current drain	0.9 mA		0.9 mA	
Battery life (cell zinc air)	~125 h		~125 h	
Battery life (rechargeable)	–		–	
IRIL IEC 118-13:2011 (bystander)				
800-960 MHz	<-10 dB SPL		<-10 dB SPL	
1400-2000 MHz	<-10 dB SPL		<-10 dB SPL	
ANSI C63.19	M3		M3	

Prompt P | Technical Data

Type

Earhook undamped



	2 ccm coupler	Ear simulator
Output sound pressure level		
at 1.6 kHz	–	133 dB SPL
Peak	134 dB SPL	138 dB SPL
HFA-OSPL 90	127 dB SPL	–
Gain		
Full on gain (FOG) at 1.6 kHz	–	69 dB
Full on gain (Peak)	70 dB	75 dB
HFA-FOG	64 dB	–
Reference test gain	50 dB	58 dB
Frequency, noise and directivity		
Frequency range	110-6000 Hz	170-6700 Hz
Equivalent input noise	24 dB SPL	24 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	3 / 2 / 1 %	4 / 4 / 1 %
Tinnitus noiser broadband	–	–
AI-DI	3.5 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	97 dB SPL
HFA MASL (1 mA/m)	93 dB SPL	–
HFA SPLITS (left/right)	110 / 107 dB SPL	–
RSETS (left/right)	0 / -3 dB	–
Battery		
Battery voltage	1.3 V	
Battery current drain	1.4 mA	
Battery life (cell zinc air)	~160 h	
Battery life (rechargeable)	–	
IRIL IEC 118-13:2011 (bystander)		
800-960 MHz	<-35 dB SPL	
1400-2000 MHz	<-24 dB SPL	
ANSI C63.19	M3 / T3	

Prompt SP | Technical Data

Type


Earhook undamped



	2 ccm coupler	Ear simulator
Output sound pressure level		
at 1.6 kHz	–	139 dB SPL
Peak	140 dB SPL	144 dB SPL
HFA-OSPL 90	133 dB SPL	–
Gain		
Full on gain (FOG) at 1.6 kHz	–	76 dB
Full on gain (Peak)	80 dB	84 dB
HFA-FOG	72 dB	–
Reference test gain	56 dB	64 dB
Frequency, noise and directivity		
Frequency range	100-5400 Hz	100-5700 Hz
Equivalent input noise	24 dB SPL	26 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	3 / 2 / 1 %	7 / 3 / 2 %
Tinnitus noiser broadband	–	–
AI-DI	3.6 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	107 dB SPL
HFA MASL (1 mA/m)	102 dB SPL	–
HFA SPLITS (left/right)	115 / 112 dB SPL	–
RSETS (left/right)	-1 / -4 dB	–
Battery		
Battery voltage	1.3 V	
Battery current drain	2.4 mA	
Battery life (cell zinc air)	~160 h	
Battery life (rechargeable)	–	
IRIL IEC 118-13:2011 (bystander)		
800-960 MHz	<-34 dB SPL	
1400-2000 MHz	<-34 dB SPL	
ANSI C63.19	M3 / T4	


Fitting Range

Prompt S

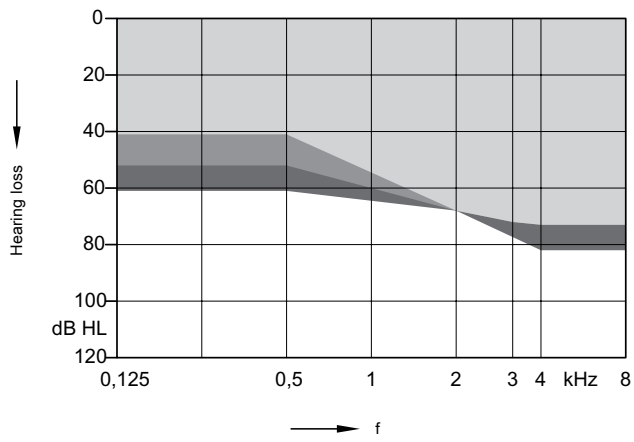


ThinTube open
 + ThinTube double
 + + Earhook damped

Prompt P

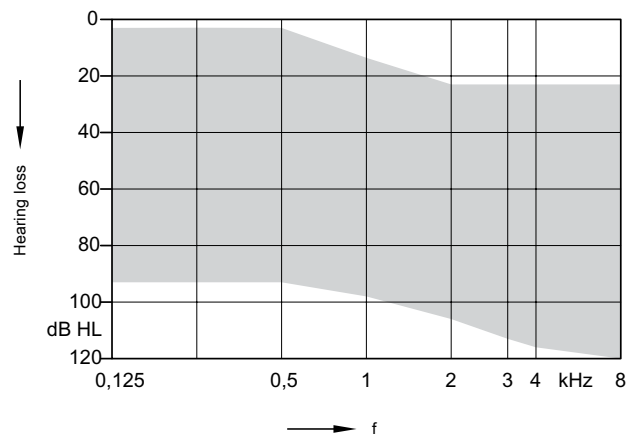

Earhook undamped


Prompt SP

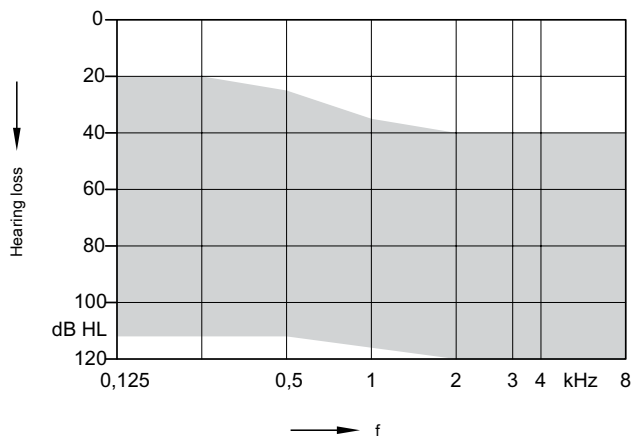

Earhook undamped

Prompt S (Earhook damped) | Basic Data


2 ccm coupler

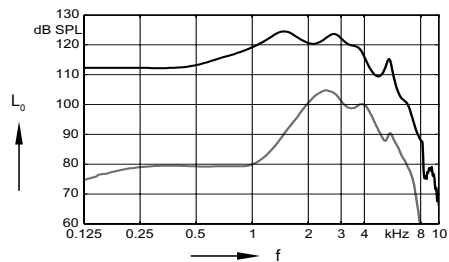

Output sound pressure level
($L_1 = 90$ dB)


Full on gain
($L_1 = 50$ dB)

Ear simulator

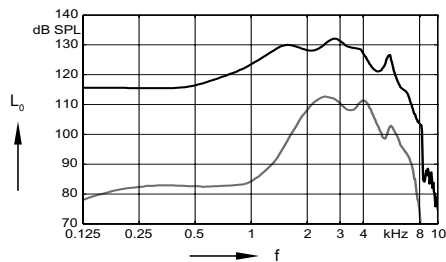


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

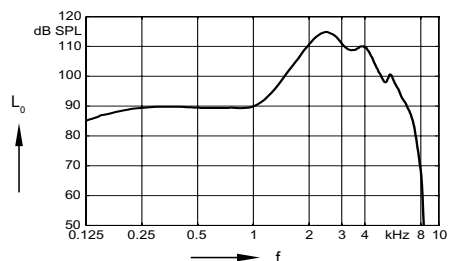


Frequency response
($L_1 = 60$ dB)

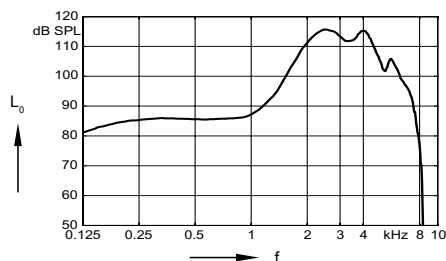




Basic acoustic response
($L_1 = 60$ dB)

Prompt S (ThinTube) | Basic Data

2 ccm coupler

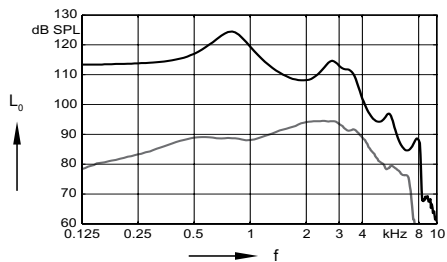


Ear simulator

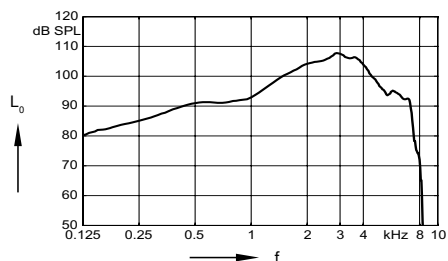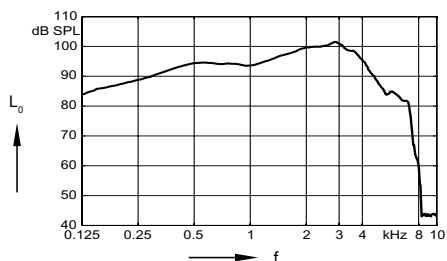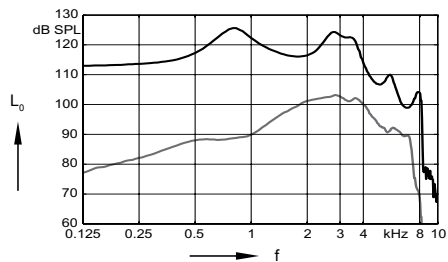

Prompt P (Earhook undamped) | Basic Data


2 ccm coupler

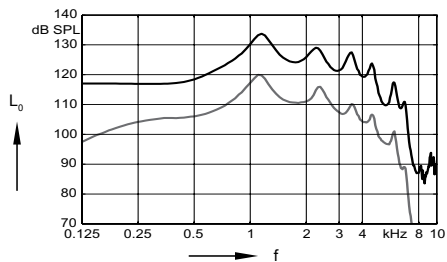

Output sound pressure level
($L_1 = 90$ dB)


Full on gain
($L_1 = 50$ dB)

Ear simulator

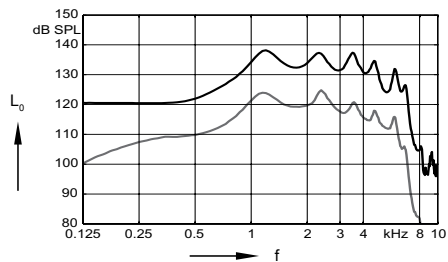


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

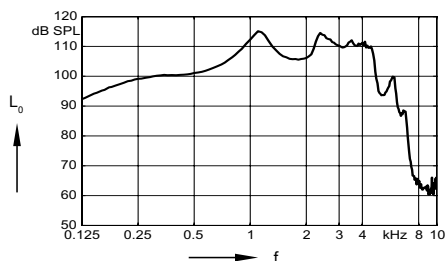


Frequency response
($L_1 = 60$ dB)

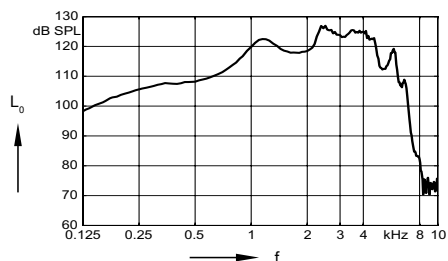


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

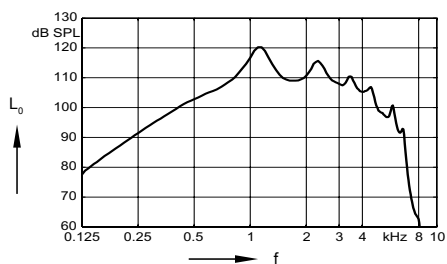

Inductive response
($H = 10$ mA/m)

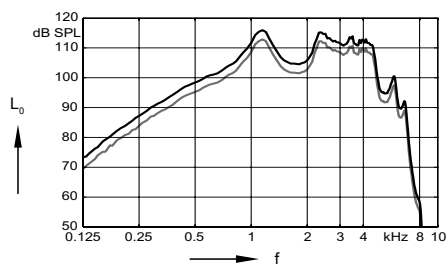


SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)

Prompt SP (Earhook undamped) | Basic Data


2 ccm coupler

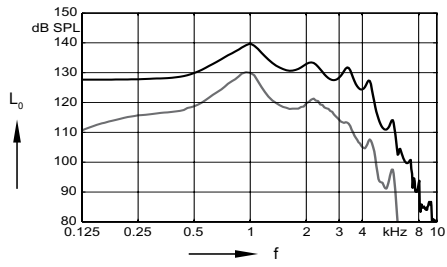

Output sound pressure level
($L_1 = 90$ dB)


Full on gain
($L_1 = 50$ dB)

Ear simulator

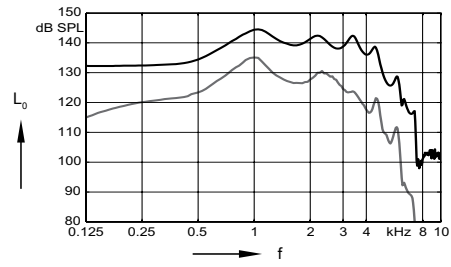


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

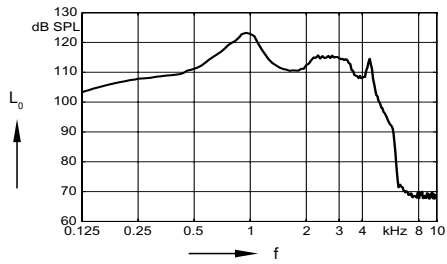


Frequency response
($L_1 = 60$ dB)

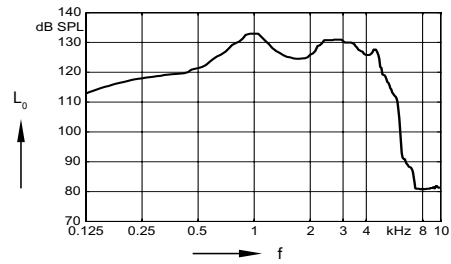


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

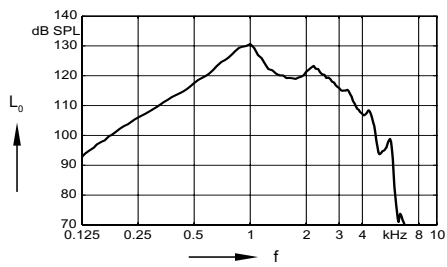

Inductive response
($H = 10$ mA/m)

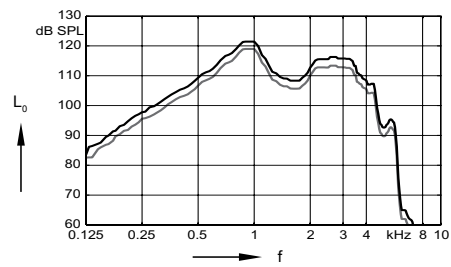

SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)

Prompt S / P / SP | Features and Accessories

	Prompt S / P / SP
Audiology	
Signal processing (channels) / Gain/MPO (handles)	8 / 4
Hearing programs	4
SpeechMaster	—
HD Music (presets)	—
TwinPhone¹⁾	—
EchoShield	—
Wireless CROS/BICROS²⁾	—
Directionality (channels)	8
Narrow Directionality¹⁾	—
Directional microphone	—
Spatial SpeechFocus¹⁾	—
SpeechFocus	—
TruEar™	—
Frequency compression	—
Extended bandwidth	—
Feedback cancellation	●
eWindScreen binaural¹⁾	—
eWindScreen™ (steps)	—
Noise Reduction (channels / steps)	—
Speech and noise management (steps)	on / off
SoundSmoothing™ (steps)	—
Directional speech enhancement (steps)	—
Adaptive streaming volume³⁾	—
SoundBrilliance™³⁾	—
Sound equalizer (classes)	—
Spatial Configurator¹⁾	—
Span⁴⁾	—
Direction⁵⁾	—
SoundBalance	—
Fitting	
Insitugram	●
Learning (classes) / Data logging	— / ●
Acclimatization manager	—
Tinnitus	
Tinnitus noiser	
Static therapy signal (handles / presets)	—
Ocean Waves therapy signal (presets)	—

Prompt S / P / SP | Features and Accessories

	Prompt S	Prompt P	Prompt SP
Style Specific Features			
Ingress Protection Rating	IP67	—	—
Telecoil	—	●	●
AutoPhone™	—	—	—
Charging contacts	—	—	—
Battery Size	312	13	675
Battery door on/off function	●	●	●
Nanocoated housing	●	●	●
e2e wireless™ 3.0	—	—	—
Audio streaming	—	—	—
User controls coupling via e2e	—	—	—
Wireless programming via ConnexxLink™	—	—	—
Instrument configurations			
Flat cover	—	—	—
Volume wheel	—	—	—
Push button	●	●	●
Rocker switch	—	●	●
Color conversion kit	—	—	—
Battery door – direct audio input	—	○	○
Battery door – child lock	—	—	—
Programming Accessories			
ConnexxLink	—	—	—
Programming adapter	●	●	●
Accessories			
miniPocket	○	○	○
CROS Pure	—	—	—
eCharger	—	—	—
easyPocket™	—	—	—
easyTek	—	—	—
TV Transmitter (req. easyTek)	—	—	—
Transmitter (req. easyTek)	—	—	—
VoiceLink™ (req. easyTek)	—	—	—
App			
MobileFitting App	—	—	—
easyTek App (req. easyTek)	—	—	—
touchControl App	○	○	○

● available ■■■■■ highest feature performance ○ optional — not available

¹⁾ req. bilateral fitting and e2e™ 3.0

²⁾ req. CROS Pure accessory

³⁾ streaming only, req. easyTek™

⁴⁾ req. easyTek & easyTek App, touchControl App or rocker switch

⁵⁾ req. easyTek & easyTek App or touchControl App

Abbreviations and Standards

Abbreviations


The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2009 and IEC 60118-7:2005 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1 and to DIN 45605 (frequency range) if applicable.
- ▶ Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ The following ear pieces were used:
 - ThinTube
 - Earhook

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

 **Legal Manufacturer**
Signia GmbH
Henri-Dunant-Strasse 100
91058 Erlangen
Germany
Phone +49 9131 308 0

Order No. 03024-99T4-7600
© 06.2019, Signia GmbH
All rights reserved

www.signia-hearing.com



Warning

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years and persons of mental incapacity.



Warning

Instrument has an output sound pressure level of 132 dB SPL or more.

- Risk of impairing the residual hearing of the user.
- ▶ Take special care when fitting this instrument.